



MN8TC

**MN8TC is a Mn-Zn ferrite with a low change in permeability at low temperatures.
Useful as door-closure sensors on aircraft.**


Typical Properties

| | |
|-------------------------|---------------|
| Initial Permeability | 1900 |
| Maximum Permeability | 6000 |
| Saturation Flux Density | 4600 Gauss |
| Remanent Flux Density | 1750 Gauss |
| Coercive Force | 0.15 Oersted |
| Curie Temperature | 185°C |
| dc Volume Resistivity | 10^3 ohm-cm |
| Bulk Density | 4.5 g/cc |


Unless otherwise specified, all tests were performed at 10 KHz, 22°C

Bs tested at 1 KHz, 20 Oersted • Br, Hc at 1 KHz, 5 Oersted


Initial Permeability vs. Temperature

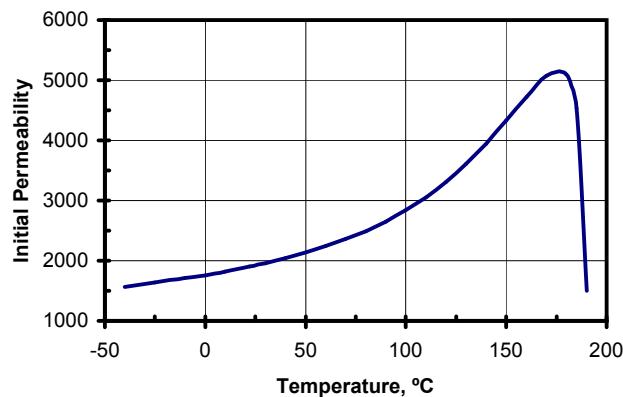

Permeability vs. Flux Density

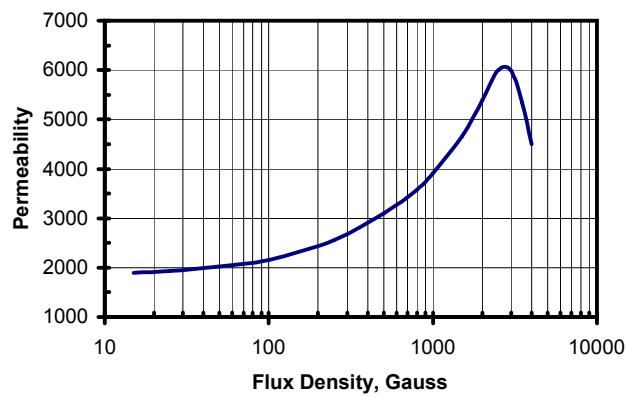

Complex Permeability vs. Frequency

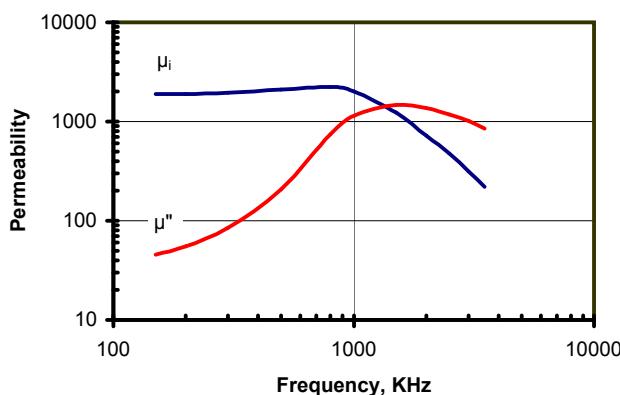

BH Loop Parameters vs. Temperature

