



# MN90

## Mn-Zn Power Ferrite

*This material is a medium frequency power ferrite designed to work at 100 KHz and 80°C. It has a permeability of 2500 at room temperature, low power loss and good magnetization. It is available in large blocks for custom-machined shapes.*


### Typical Properties

<b>Initial Permeability</b>	<b>2500</b>
<b>Maximum Permeability</b>	<b>6200</b>
<b>Saturation Flux Density</b>	<b>4200 Gauss</b>
<b>Remanent Flux Density</b>	<b>600 Gauss</b>
<b>Coercive Force</b>	<b>0.085 Oersted</b>
<b>Curie Temperature</b>	<b>215°C</b>
<b>dc Volume Resistivity</b>	<b>4000 ohm-cm</b>
<b>Bulk Density</b>	<b>4.42 g/cc</b>


*Unless otherwise specified, all tests were performed at 10 KHz, 22°C*

*Bs tested at 1 KHz, 20 Oersted • Br, Hc at 1 KHz, 5 Oersted*


**Initial Permeability vs. Temperature**

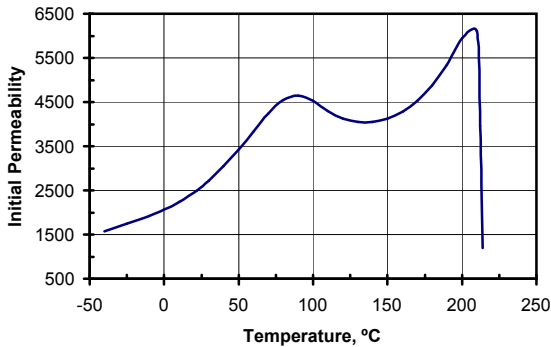


**Permeability vs. Flux Density**

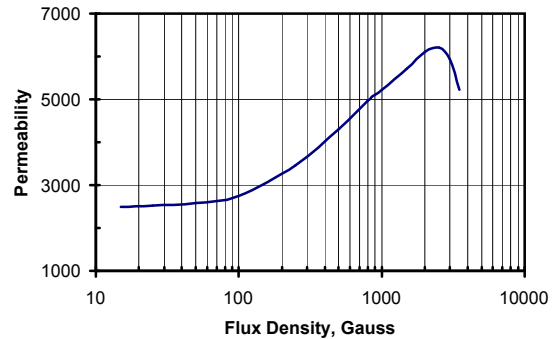

**Complex Permeability vs. Frequency**

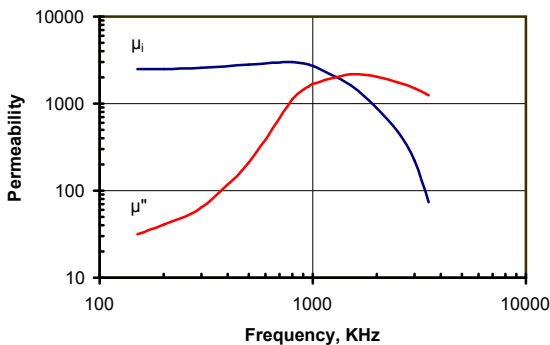

**BH Loop Parameters vs. Temperature**

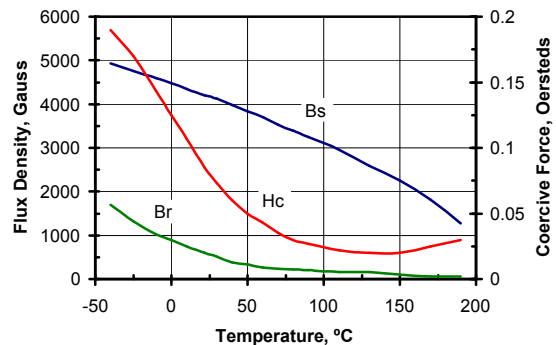




# MN90

## Mn-Zn Power Ferrite

Power Loss vs. Temperature at 100KHz

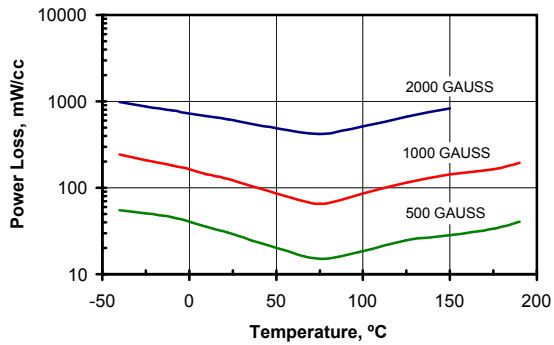

Power Loss vs. Frequency at 100°C

